


Samsung is moving ahead and with our customers


"Put simply, our differentiation is centered on producing innovative technology that brings genuine change to people's lives. We do this by bringing a relentless focus on consumer experience and product innovation in everything we do."

- Sue Shim CMO (Chief Marketing Officer), SAMSUNG



Global Business Network

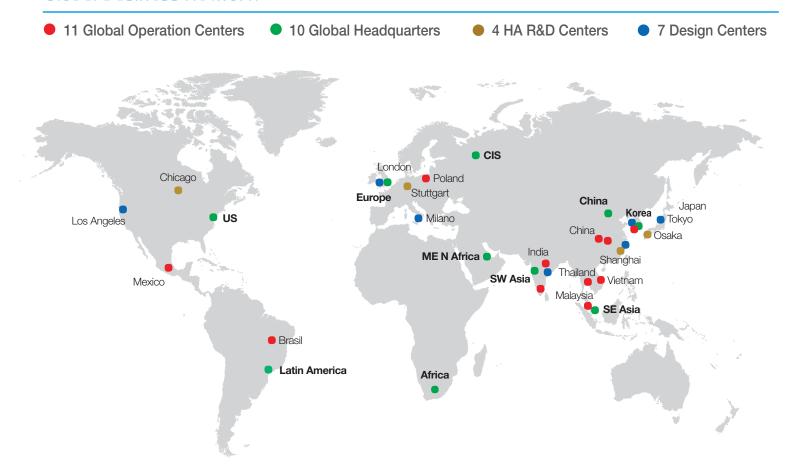


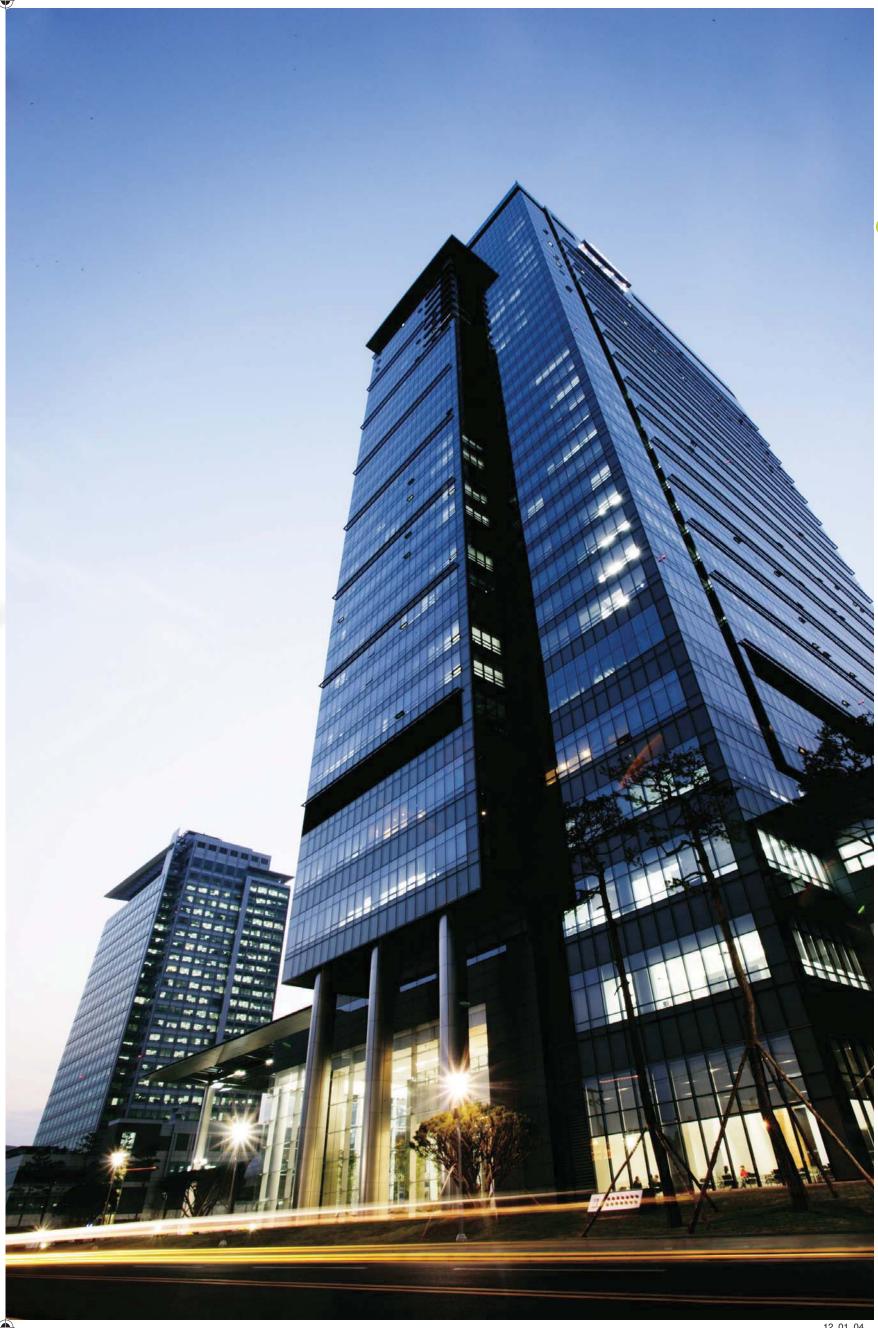

2012 intro_tech_split type.indd 4-5



12. 01. 04 3:39

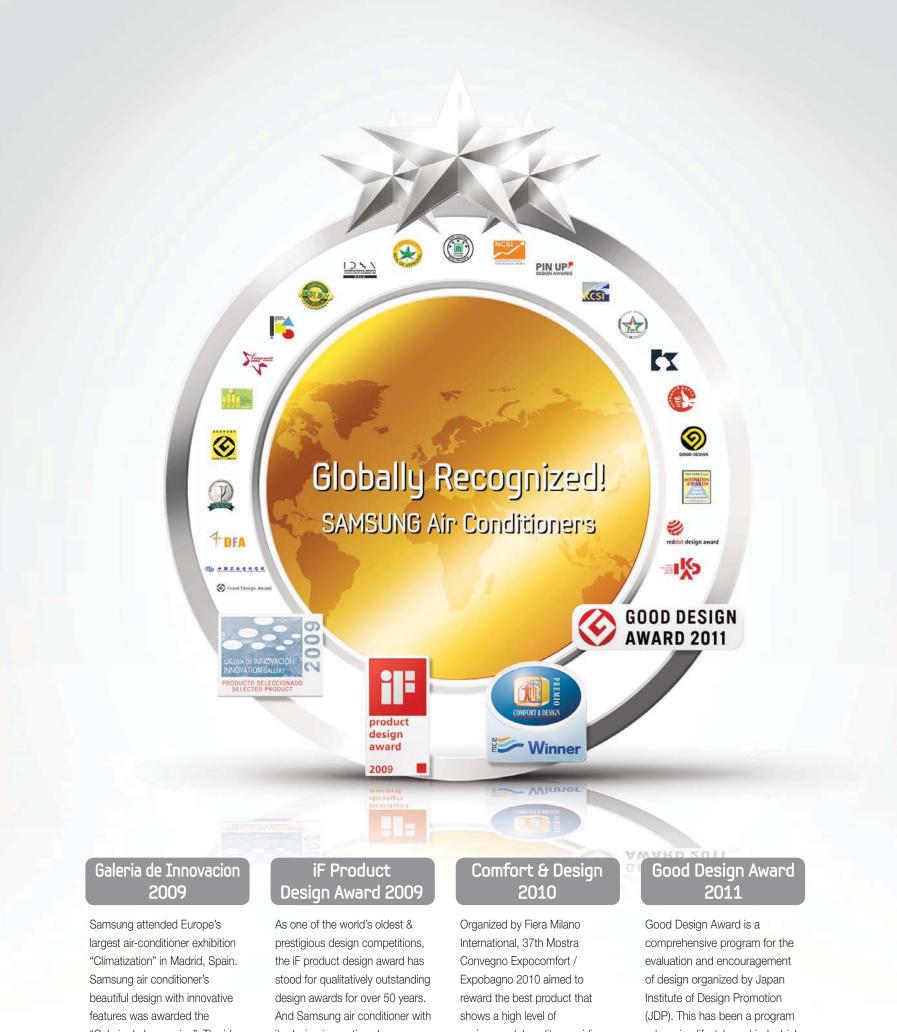

"Galeria de Innovacion". The idea behind this award is to encourage innovation in the practical application of know-how and technologies in industrial development. Once again, Samsung proves its unsurpassed standards in quality.

its design innovations has won the iF product design award for the year 2009. Samsung air conditioner continues to receive worldwide recognition and awards, proving high quality of function and beauty.

environmental quality, providing a complete overview of the sector along the lines of "Comfort & Living Technology". And Samsung air conditioner won the prize conferring a valid and professional recognition for the best product in the ceremony.

advancing lifestyle and industrial activity by selecting outstanding design. Samsung air conditioner , Y series, has advanced to the finals for the year 2011.





2012 intro_tech_split type.indd 10-11



Smart Inverter



Save energy with World Top Class EER




What is the Smart Inverter?

Samsung Smart Inverter technology saves energy while the air conditioner is on by maintaining the ideal temperature without constant shutting off and on of the compressor.


Smart Inverter

Smart Inverter technology automatically adjusts power to cope with any temperature variances, assuring you have optimal comfort.

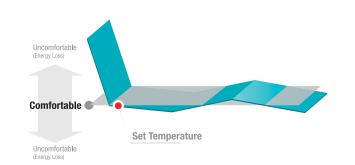

Non-inverter

Non-inverter air conditioners are continuously shutting down when it reaches the set temperature, which causes large fluctuations in temperature and comfort.

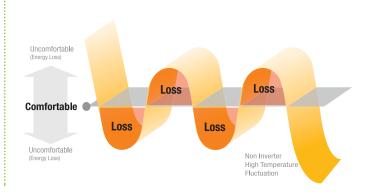

Save energy, money, and stay cool!

The Smart Inverter allows you to stay comfortable for a long period of time while using the least amount of energy.

Save Energy



Enhanced control of the Smart Inverter reduces energy consumption so you can save more money on your electricity bill.

Stay Comfortable



The set temperature is maintained without extreme temperature fluctuations so you stay consistently comfortable.

Save more with the Smart Inverter

Although the unit price of Smart Inverter air conditioner is initially higher than a non-inverter air conditioner, it pays for itself in time with the money you save on electricity bills.



Savings

(

Zero Standby Power

ZER()

Save energy whether on or off



Double savings

A Smart Inverter Air conditioner helps you save energy twice, once while the air conditioner is on and again when it's off.



World Top Class EER 5.2, save your energy

With increased control technology, Samsung air conditioner helps you significantly reduce wasted energy. It has achieved World Top class EER by saving up to 80% in energy usage.

Samsung EER / COP 5.2 / 5.2

K Series 9k Btu

Greatest energy efficiency!

You'll be amazed by the comparison. Samsung's air conditioner receives the World Top Class EER for high energy efficiency.



Samsung
EER/COP 5.2/5.2

Competitor A
EER/COP 5.0/5.1

Competitor B
EER/COP 5.15/5.25



Zero Standby Power, save up to 90%

The improved control board installed in the Samsung air conditioner uses miniscule amounts of energy when the air conditioner is off, resulting in 90% more energy savings than conventional air conditioners.



Bigger savings, greater comfort

With the energy saved by using Zero Standby Power for a month, you can power up other home appliances for FREE!

Smart Saver



Enjoy worry-free fresh cooling



Save up to 31% on your electricity bill!

In Smart Saver mode, the air conditioner's compressor operates in the least amount of time to cool the room, which saves electricity. With the Smart Saver, stop worrying about your electricity bill and enjoy its convenience.

Set Temperature	Mode	Power Consumption (4hr)	Power Saving Rate (Compared to regular mode)
26°C	Regular Mode	1778	-
20 0	Smart Saver	(4hr) (Co	31%
24°C	Regular Mode	2201	-
2430	Smart Saver	1930	12%

Up to 31% Savings!

*Outdoor temperature at 30 degree *Samsung test results

This is when you need Smart Saver!



When you repeatedly turn the air conditioner on and off to save energy.



When you don't want to waste energy cooling an empty room.



When you debate turning on the air conditioner because its not unbearably hot.

Preserve nature with Samsung!

With the innovative Smart Saver function, users can significantly save energy and money. Feel proud of that you are doing your part in preserving the environment by using an energy-efficient product.





S-Plasma ion (Virus Doctor)





What is S-Plasma ion?

An amazing air purifying technology, 'S-Plasma ion', neutralizes all harmful contaminants in the air including bacteria that resists physical filtration, turning these contaminants into harmless water vapor.



S-Plasma ion has received three awards, gaining recognition both at home and abroad.



2010 AHR EXPO Innovation Awards in the indoor air-quality category



1st Air Day Minister of the



How does S-Plasma ion eliminate biological contaminants?

Whereas conventional filter-based purifying systems can only affect processed air, Samsung air conditioners with S-Plasma ion proactively remove all contaminants, thus improving air quality.



Active hydrogen / Oxygen ions

1. Active hydrogen and oxygen ions are generated.



Harmful substances

2. Combines with the harmful OH radical,



3. Turns into harmless

water vapor.

19.16m³ superb coverage

The S-Plasma ion purifies over 19.16m³ of space unlike its competitors. So, you can rely on clean, safe air even in large spaces.

Competitor	Samsung S-Plasma ion
4 m³	19.16 m³

*Samsung test results



2012 intro_tech_split type.indd 18-19 12. 01. 04 3:39

OH Radical neutralization effects

ion neutralizes OH Radicals and reduces cell damage.

as VOCs (Volatile Organic Compounds).

S-Plasma ion OFF S-Plasma ion ON

Clean Air _ Remove allergens in the air

Relaxing Air _ Generate relaxing oxygen ions

* Test institution : Hiroshima

(Laser Induced Fluorescence)

* 7th Colloquium ASA (Atmospheric Spectroscopy Applications) * Atmospheric observation of OH Radical reactions with Atomic Hydrogen produced in Plasmas by LIF

* Temperature : 24 °C

Free from harmful positive ions

S-Plasma ion, Samsung's outstanding and unique technology, has received the BAF

Neutralization of OH Radicals with the S-Plasma ion

S-Plasma ion substantially reduces the level of concentration of OH

Radicals, which cause aging and various skin diseases.

* Research paper on neutralizing OH Radicals (September 6, 2005, France)

(United Kingdom) Seal.

As positive ions can cause symptoms such as difficulty in breathing, headache, and nausea, Samsung's special S-Plasma ion technology generates nearly zero harmful positive ions to keep your family safe.





S-Plasma ion

Free from ozone

S-Plasma ion technology produces virtually no ozone, an air pollutant with harmful effects on the respiratory system. Producing less than 1/5th of the concentration level stipulated in international indoor ozone regulations, S-Plasma ion technology lets you breathe easy.

Certification status

	Substances	Effectiveness	Verification Institute
	Influenza A virus subtype H1N1 (Swine flu)	99.99% eliminated	Chungnam National University (Korea)
	Influenza A virus H5N1 (Avian influenza)	99.99% eliminated	Retroscreen (UK)
Virus	Influenza A virus H1N1 (Spanish influenza)	99.6% eliminated	Kitasato Environmental Science Center (Japan)
	Influenza A virus H3N2 (Asian influenza)	99.6% eliminated	Yonsei University (Korea)
	Corona Virus (the same family as SARS)	99.6% eliminated	Kitasato Medical Center (Japan)
	MRSA ¹⁾	99.99% eliminated	Kitasato Medical Center (Japan)
	Staphylococcus	99.97% eliminated	Kitasato Environmental Science Center (Japan)
Bacteria	Escherchia coli	99.9% eliminated	Korean Consuming Science Research Center (Korea)
	Micrococcus	99.9% eliminated	Kitasato Environmental Science Center (Japan)
	Bacillus subtilis	99.7% eliminated	Kitasato Medical Center (Japan)
	Aspergillus	99.9% eliminated	Korean Consuming Science Research Center (Korea)
mold	Penicillium	99.9% eliminated	Korean Consuming Science Research Center (Korea)
	Cladosporium	98.9% eliminated	Kitasato Environmental Science Center (Japan)
Allergen	Der p1 (Dust mites) Fel d1/Can f1 (Dog/cat hair)	effective	Acquire BAF ²⁾ Seal (UK)
	Allergen	effective	RTI® Test (US)
OH-Radicals	Neutralization of OH Radicals	Verified	Hiroshima University (Japan)
	Inhalation Toxicity Test	Non-toxic	Seoul Toxicology Laboratory (Korea)
Safety	Conjunctiva & Skin irritation Test	Non-toxic	Clinical Research Institute at Seoul National University (Korea)


1) MRSA: Methicillin-Resistant Staphylococcus Aureus (Antibiotic-resistant nosocomial pathogens)

2) BAF: British Allergy Foundation (Certification institute)

Healthy Air _ Eliminate the influenza virus

Viral removal testing was carried out on the influenza virus, the most common airborne virus, leading to confirmation of S-Plasma ion's ability to effectively eliminate more than 99% of influenza viruses in the air. (Certification by: Korea-Yonsei University, Chungnam National University / Japan - Kitasato Environmental Science Center, Medical Center)

Influenza subtype A H1N1 eradication experiment



 * Research carried out by : Professor Seo Sang-hui of Chungnam National University (Developed the world's first H1N1 vaccine for the human body

Microbial test results (Staphylococcus aureus)


Competitor



* Size of chamber : 900mm(W) x 500mm(D) x 600mm(H)

MRSA (Antibiotic-resistant bacterium)

S-Plasma ion removes 99.99% of MRSA, which is resistant to antibiotics.



* Test sample : Device only Measurement time: 2 hours

* Size of chamber: 1m3




2.4 x 10²cfu/300L air

7.3 x 10°cfu/300L air

³⁾ RTI : Research Triangle Institute (Allergy research institute in the US)

Full HD filter

Block up to 90% of dust

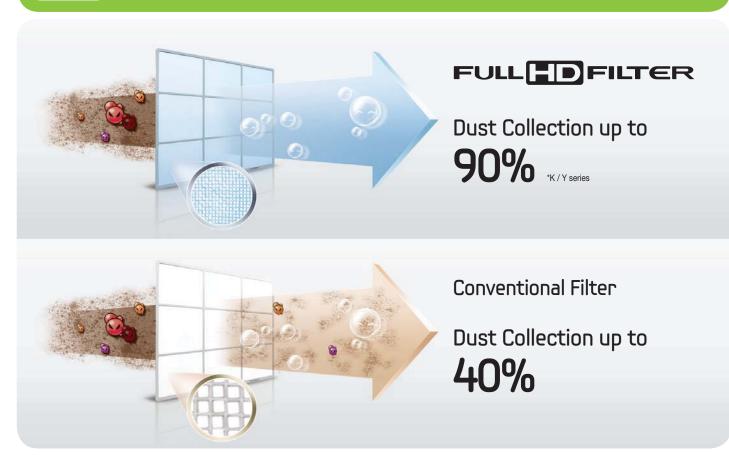

Full HD filter types

22

There are three different types of Full HD Filters. The ultra-compact filters remove even the smallest dust particles. Also the anti-bacteria coating and allergy care system not only remove bacteria and house dust but also eliminate allergens.

	0			
	Conventional	Full HD 60	Full HD 80	Full HD 90
X 40				
X 150				
Application Model		Max	P, T Series / Crystal	K, Y Series
Filament Dia.	211	134	60	57
Dust Collection	40%	60%	80%	90%
Feature	Anti-Bacteria coating			Allergy Care

Easier and care-free filter cleaning!

All you need to do is simply wash out the dirt with flowing water to clean the filter. Always keep your air clean and fresh with simple and easy care of the filter.

Anti-bacteria coating


Due to the anti-bacteria coating's unique structure, this filter collects even the smallest microscopic dust particles and viruses for the complete protection.



Allergy care

Samsung's filter removes not only bacteria and dust particles but also reduces allergy symptoms.





Samsung enhanced purifying system with advanced filter and smart S-Plasma ion. S-Plasma ion further cleans the air that has already been filtrated by the Full HD Filter to ensure a fresher and healthier environment.







STEP 2.



The air purifying device eliminates 99% of contaminants, bacteria and viruses in the air.

Anti-Allergy tested by National Food analysis center of Japan

12. 01. 04 3:40 2012 intro_tech_split type.indd 22-23




d'light cool





Optimum temperature for best comfort

People can feel comfort or discomfort even at the same temperature due to the varying level of humidity in the air. Samsung's d'light cool system automatically checks the current humidity and temperature and adjusts for the most pleasant

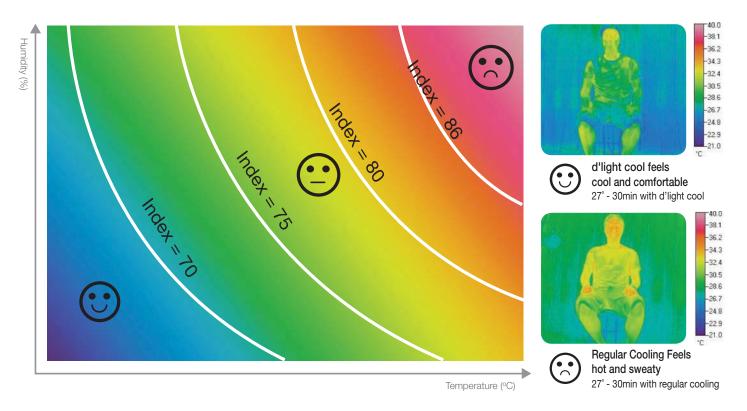

How d'light cool works

- 1. It first measures the humidity and temperature in the room.
- 2. It calculates what temperature and humidity is needed to reach the comfort index.
- 3. It adjusts the temperature and humidity automatically until the comfort index is reached.

No more wasteful cooling

- 1. Accurately measure humidity & temperature to maintain the ideal comfort index.
- 2. No need to reset the temperature with automatic temperature control.
- 3. Customized cooling, which reduces energy waste.



Power Consumption (Operation : 2hrs)



Wide Twin Blade



Effective cooling even in larger areas

120° wider coverage

Samsung's Wide Twin Blade expands air coverage to 120 degrees. This improved distribution lets you feel comfortable faster.



Wider Heating / Cooling

*Samsung test results

90° vertical airflow

Samsung's Wide Twin Blade individually controls the airflow at optimum angles. The double layered blade provides long range airflow to deliver heating or cooling for larger spaces.



Direct Heating / Cooling

*Samsung test results

13m long range cooling

With long-range air flow that reaches to 13m, you can feel cool air instantly even though you are far from the air conditioner.



Long Range Cooling Coverage

Samsung test result

3D Wind

With Samsung's Wide Twin Blade, the air flows throughout the room evenly. The wider and longer blades provide advanced airflow in the room allowing you to experience a cooler environment in a shorter time.





120° wider coverage

The airflow covers 120° angle for complete comfort.



90° vertical airflow

Two blades individually flows air down to the floor at 90°.



13m long range cooling

The air distributes further throughout the room with long-range airflow.


good'sleep



Sleep like a baby



Best temperature for deep sleep

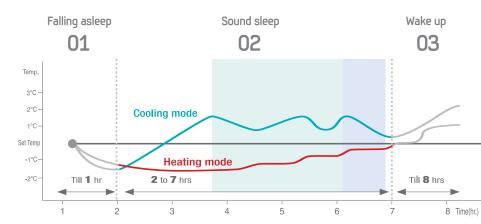

01 Falling asleep stage

Eases you into sleep by dropping the temperature.

02 Sound sleep stage

Relaxes your body and raises your temperature slightly.

03 Wake up stage

Allows you to wake up from comfortable intermittent air and makes you feel refreshed.

Everything improved!

Sleep efficiency

The good'sleep mode increases sleep efficiency compared with competitors.



Pleasant skin temperature

The temperature setting of good'sleep maintains pleasant skin temperature, keeping you more relaxed and comfortable.



Energy saving

The good'sleep mode reduces up to 36% of electricity consumption compared with a normal cooling mode.



Turbo Cooling



Instantly cool your space




Maximum cooling!

When you turn on the Turbo Cooling mode, the compressor operates in its maximum speed for 30 minutes to cool down your space quickly.




Cool down faster than ever

Compared to normal operation mode, Turbo Cooling cools the space 15% faster. When you need instant cooling, Turbo Cooling is the perfect answer.

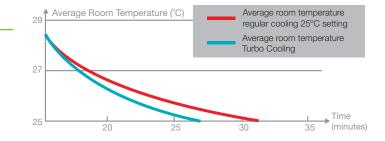

Even cooling

Illustrated in the table on the right, Samsung's cool air evenly distributes throughout the room quicker than regular cooling.

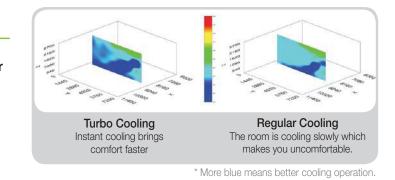

Quiet Operation




Relax with peace and quietness



Immensely low vibration with twin BLDC

The highly efficient twin BLDC compressor extremely reduces variation by 40% when compared to the conventional single BLDC compressor.



Highly Efficient BLDC Motor

- Creative motor core design
- High density neodymium magnet
- Concentrated type stator

Extremely Low Vibration

Twin eccentric cams - 2 balance weights

Highly Stable Moving Parts

- Optimal material matching rollers and vanes
- Highly robust bearings
- Coated vane Coated shaft

More stable fan spin

New fan hub's depth is increased from 90 mm to 119mm and the diameter is widened by 32%. The reinforced fan hub makes the spinning more stable, reducing vibration noise when the air conditioner is in operation.


Stronger body pillar


Once the air conditioner is turned on, the outdoor unit's case makes a high level of noise due to vibration and loose jointed parts. Samsung's strengthened body pillar holds the case more tightly to inhibit vibration and adds durability.



Seamless airflow

The air conditioner's air path has been widened and streamlined to reduce air friction. This reduces the whizzing sound without compromising powerful blasting wind.





30

12. 01. 04 3:40 2012 intro_tech_split type.indd 30-31



2012 intro_tech_split type.indd 32-33

Triple Protector



Enjoy steady and stable cooling with ultimate durability



How to work

Samsung's integrated protection technology offers better durability and reliability. Its powerful cooling system (Engine Protector), constant volt control (Controller Protector), and effective anti-corrosion coating (Fin Protector) allow you to have perfectly fresh cooling air for a longer period of time.



• Engine protector

Samsung's distinctive engine protector prevents compressor from being overloaded by unstable electricity circumstances, so you can always rely on having a cooled room evenly.

Item	SAMSUNG	Competitor
Compressor Protection	Up to 140 V	Up to 170 V

Occupanie Controller protector

Samsung's advanced controller adjusts to avoid breakdowns from unstable power supplies. This special technology withstands power fluctuations from 80V to 450V, so you always have unbeatable coolness regardless of circumstances.

Item	SAMSUNG	Competitor
Controller Protection	From 80 V to 450 V	Up to 400 V
Smart Protection	Yes	No



'Smart Protection'

Outstanding anti-corrosion protector

Anti-corrosion fin condenser and MCC are designed with strong corrosion-resistant material to protect itself from rusting. This fin strongly protects the condenser from corrosion to give you cool and clean air without worries of being worn.



Samsung's anti-corrosion fin



Conventional

4

Stabilizer-Free Operation





"Built-in" stabilizer!

The Stabilizer Free air conditioner improves the look of your home since you don't need to install a separate stabilizer.



Exceptional comfort with powerful air

Samsung Built-in Stabilizer gives you fresh, powerful air in any circumstance. This air conditioner with built-in stabilizer regulates voltage stability to withstand even severe fluctuations and power outages.



Built-in stabilizer saves money


Since you don't need to invest in a separate stabilizer, Samsung Built-in Stabilizer helps save money.



UTR Plus™




Powerful cooling even at 54°C

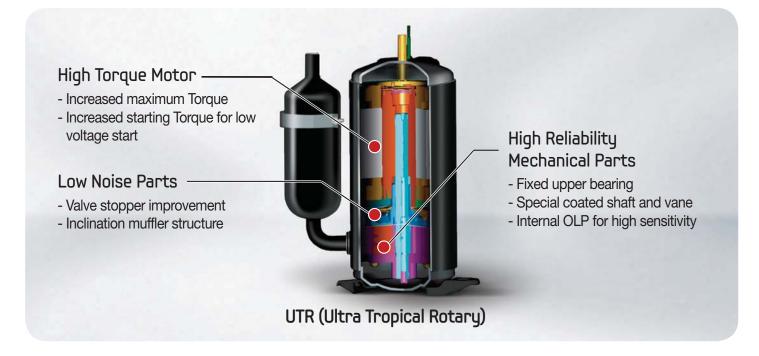

Consistent cooling in any kind of weather

The UTR Plus™ with its strong motor can quickly cool the air even in extreme hot climates of 54°C, and it is 23% faster than the conventional "Reciprocating" compressor.

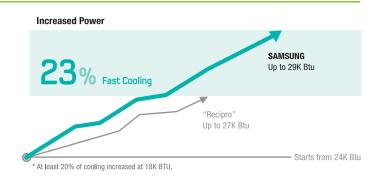

Long-lasting coolness without breakage

Samsung's UTR Plus™ compressor extends its lifespan by enhancing its welding method with new durable material, so you can enjoy its powerful performance for a longer period of time.

Samsung UTR Plus Compressor		neciprocaling (Reciprocating Compressor		
Components	Wear Rate (%)	Judgement	Components	Wear Rate (%)	Judgement
Shaft	5%	Excellent	Shaft	200%	Poor
Roller	15%	Good	Connecting Rod	90%	Not Satisfactory
Vane	1%	Excellent	Wrist Pin	48%	Good
Upper Bearing	17%	Excellent	Lower Bearing	108%	Not Satisfactory
Lower Bearing	12%	Good	Upper Bearing	82%	Not Satisfactory
Cylinder	11%	Excellent	Piston	85%	Not Satisfactory

Certifications for reliability and performance

Samsung UTR Plus™ received many certifications which prove its outstanding reliability and strong performance, ensuring your satisfaction and comfort.



Reciprocating comp)


EEE All UTRs

All UTRs are licensed by KSA (Kingdom of Saudi Arabia)

36

3

2012 intro_tech_split type.indd 36-37

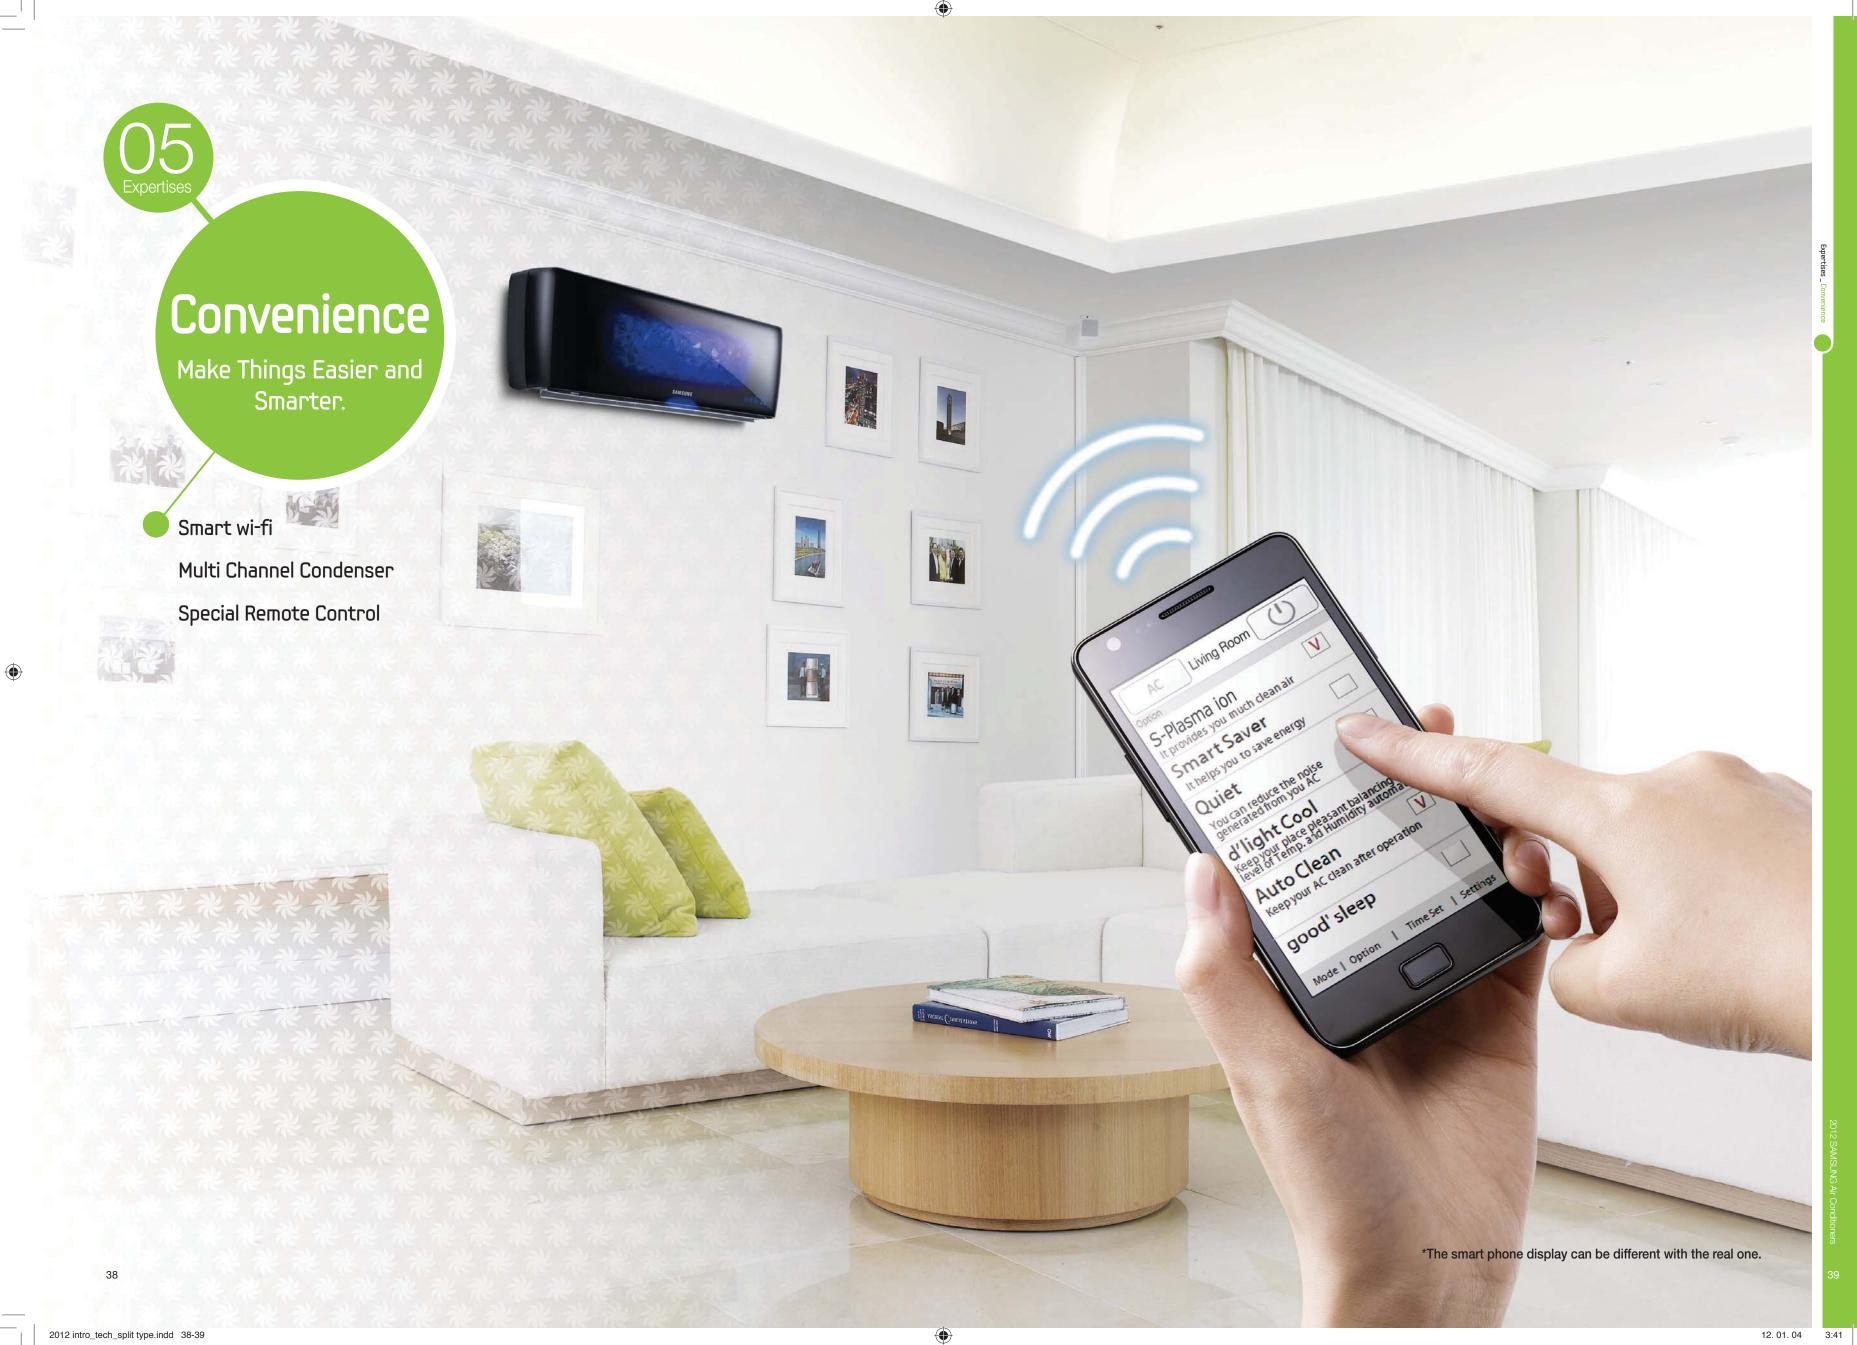

2012 intro_tech_split type.indd 38-39

Smart wi-fi



Control your cool anytime anywhere





How Smart wi-fi works from outside the house

Since you can control your air conditioner with your smart phone or computer, you never have to worry that you accidently left the air conditioner on. With the smart device, you can easily turn it off from outside the house. Furthermore, you can turn it on before you arrive so you always enter a cool house.





How Smart wi-fi works from inside the house

You also can use your smart phone like a remote control because it contains most of the functions of the remote control.



	Inside the house		Outside the house
Power on / off	Operation mode	Temperature setting	Power on / off
S-Plasma ion	Smart saver	Quiet mode	Operation mode
d'light cool	Auto clean	good'sleep	Temperature setting

MCC (Multi Channel Condenser)



Achieve high efficiency through innovation




Remarkable innovation for the heat exchanger!

Samsung's Multi Channel Condenser increases the heat exchange surface with multi channel flow, and with its new flat surface design, it reduces air resistance compared to conventional heat exchangers. Therefore, the cooling efficiency has been improved!



Compared to conventional ones, Samsung MCC heat exchanger performs faster, resulting in faster heat exchange. So, your space can be cooled instantly.







Special remote contro





2012 intro_tech_split type.indd 42-43

K-Series (Jungfrau Flagship)

The elaborately designed Samsung's K-Series air conditioner helps to reduce energy consumption to save money, so you can enjoy both the best in style and energy efficiency.



Additional features











Smart Inverter

Smart Inverter maintains the ideal temperature without 0W of energy when it's off, that constant shutting off and on of the compressor.



S-Plasma ion

S-Plasma ion eliminates up to 99%

of the biological contaminants in the air such as dust, bacteria and even

The Full High Density Filter collects up to 90% of dust and allergy causing bacteria.





Smart Saver

Beep On/Off


Auto Restart

Natural Breeze



The Wide Twin Blades and 4 Way Auto Swing provide advanced airflow all around the room for even distribution.






results in 90% more energy





the temperature to create the most adjusts the temperature and comfortable environment at night. humidity level to maintain the most pleasant environment.










Auto Changeover

Wide-Twin Blade










Auto Mode

Auto Clean

() Auto Air Direction (Up/Down) Auto Air Direction (Left/Right)

Available color & dimension





Outdoor units & remote control

9K BTU

Inverter





44

12. 01. 04 3:41 2012 intro_tech_split type.indd 44-45


Y-Series (Jungfrau Premium)

With outstanding purifying technology and consistent cooling power in any circumstance, the Samsung Y-Series air conditioner ensures comfort.



Additional features











Smart Inverter maintains the ideal temperature without constant shutting off and on of



The air conditioner uses almost 0W of energy when it's off, that results in 90% more energy

S-Plasma ion

S-Plasma ion eliminates up to 99% of the biological contaminants in the

Full HD Filter

The Full High Density Filter collects up to 90% of dust and allergy causing bacteria.








The Wide Twin Blades and 4 Way Auto Swing provide advanced airflow all around the room for even distribution.



most pleasant environment.







air such as dust, bacteria and even






sion Fin)



Real-time timer Auto Changeover




Allergy Care



Auto Clean

Auto Mode




	Fin Protector (Anti-corro
(1)) ON	Beep On/Off

Auto Air Direction (Left/Right)

Auto Restart

Available color & dimension





Outdoor units & remote control

9K BTU



Inverter





12. 01. 04 3:41 2012 intro_tech_split type.indd 46-47



Zero Standby Power

savings.

good'sleep

Turbo Cooling

Quiet Mode

Twin BLDC

(> Auto Air Direction (Up/Down)

The air conditioner uses almost

resulting in 90% more energy

OW of energy when it's off,

S-Plasma ion (optional)

H1N1 virus.

Anti Bacteria Coating

Dehumidification

BLDC

S-Plasma ion eliminates up to 99%

of the biological contaminants in the

air such as dust, bacteria and even

Engine Protector (OLP Compressor)

Manual Air Direction (Left/Right)

Rely on the Samsung P-Series air conditioner for longer lasting coolness, sophisticated style, and healthier living.



9K / 12K BTU

205mm 230mm

Full HD Filter

Auto Clean

(Auto) Auto Mode

Auto Restart

The Full High Density Filter collects up to 80% of dust and allergy causing bacteria.

Controller Protector (Volt Control PCB)

Multi-channel Condensor

* The colors may be different depending on region.

Silver

Additional features

Smart Inverter

Smart Inverter maintains the

the compressor.

Natural Breeze

Smart Saver

24-Hour timer

(Auto Changeover

ideal temperature without

constant shutting off and on of

Fin Protector (Anti-corrosion Fin)

Available colors & dimensions

	Inv	erter	
9K BTU	12K BTU	18K BTU	24K BTU
		RMARK	ALSON
	NAME OF THE PARTY	THE REAL PROPERTY.	SCHARE
The second secon	TO STANZE	SCAARII.	School Street


Outdoor units & remote control





T-Series (Boracay)

In the hottest of summers, depend on the T-Series to cool your space quickly, so you can enjoy coolness all day long.

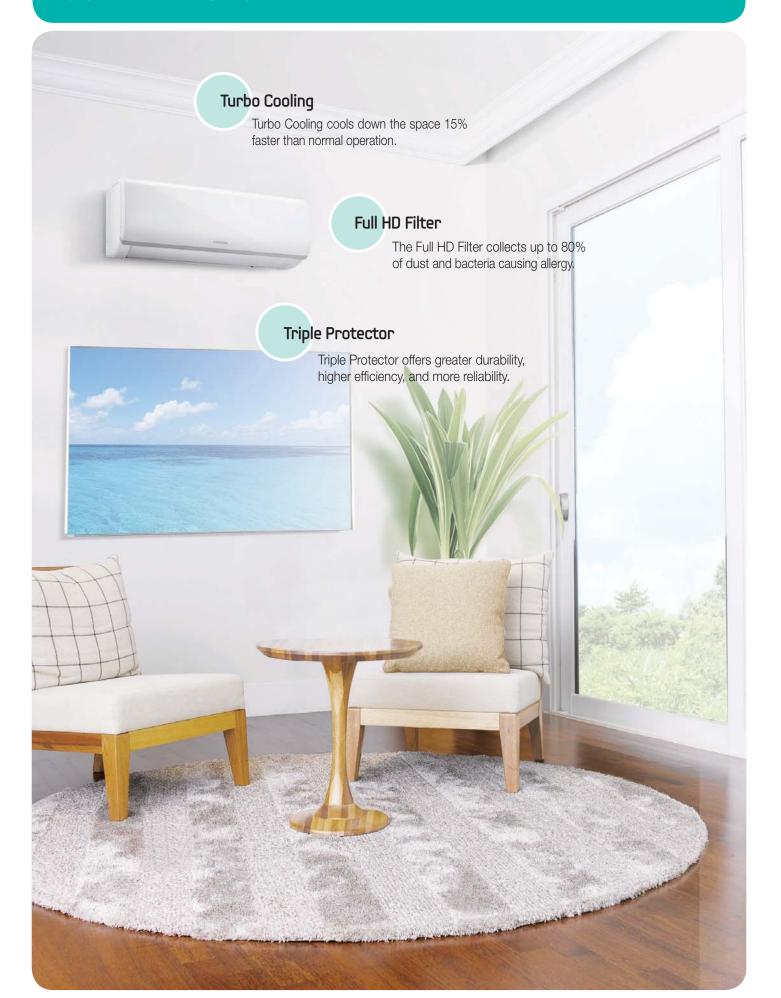

Additional features









Smart Saver

which saves electricity.


Full HD Filter

Turbo Cooling

In Smart Saver mode, the compressor operates in the least amount of time to cool the room,

The Full High Density Filter collects up to 80% of dust and allergy causing bacteria.

Turbo Cooling maximizes the speed of cooling and heating to quickly reach the set temperature.



ZERÓ Zero Standby Power	good'sleep	Anti-Bacteria Coating	Auto Clean
Natural Breeze	Dehumidification	(Auto) Auto Mode	S Fan Mode
Quiet Mode	Engine Protector (OLP Compressor)	Controller Protector (Volt Control PCB)	Fin Protector (Anti-corrosion Fin)
Multi-channel Condensor	24-Hour timer	Auto Air Direction (Up/Down)	Manual Air Direction (Left/Right)
Auto Restart	Auto Changeover		

Available colors & dimensions



		Biao		
5K / 7K BTU	9K BTU	9K / 12K BTU	12K / 18K BTU	18K / 24K BTU
728mm 255mm	728mm 255mm	820mm 285mm	890mm 285mm	1065mm 298mm 225mm
			* The colors may be o	lifferent depending on region.



Europe

				K-series (Jungfrau-F)			Y-series (Jungfrau-P)	
Model Code			AQV09KBBN	AQV12KBBN	AQV18KBBN	AQV09YWAN	AQV12YWAN	AQV18YWAN
AC Type			INV. HP	INV. HP	INV. HP	INV. HP	INV. HP	INV. HP
Refrigerant Type			R410A	R410A	R410A	R410A	R410A	R410A
Performance								
Capacity	Cooling	Btu/hr.	8,530	11,942	17,060	8,530	11,942	17,060
		(min~max)	3378~11260	3378~13648	5459~20472	3378~10918	3378~13648	5459~20472
		Kcal/hr.	2,150	3,010	4,300	2,150	3,010	4,300
		(min~max)	850~2840	850~3870	1380~5160	850~2750	850~3870	1380~5160
		kW	2.5	3.5	5	2.5	3.5	5.0
		(min~max)	0.99~3.3	0.99~4.0	1.6~6.0	0.99~3.3	0.99~4.0	1.6~6.0
	Heating	Btu/hr.	10,918	13,648	20,472	10,918	13,648	20,472
		(min~max)	3378~20472	3378~22519	4094~25590	3378~16036	3310~18425	4094~25590
		Kcal/hr.	2,752	3,440	5,160	3,010	3,440	5,160
		(min~max)	850~5160	850~6020	1030~6450	850~4040	830~4640	1030~6450
		kW	3.2	4.0	6.0	3.2	4.0	6.0
		(min~max)	0.99~6.0	0.99~6.6	1.2~7.5	0.99~4.7	0.99~5.4	1.2~7.5
Energy Efficiency	Cooling	EER(Btu/W)	17.7	15.4	11.0	16.4	14.0	11.0
		EER(W/W)	5.20	4.50	3.21	4.80	4.10	3.21
	Heating	COP(W/W)	5.20	4.50	3.61	4.80	4.10	3.61
Moisture Removal		ℓ/hr.	0.8	1.3	2.0	0.6	1.1	2.0
Air Circulation (Max)		m³/min	9.6	10.1	14.4	10.3	11.0	14.4
Noise Level	Indoor High/Low	dB	39/20	41/20	43/26	39/21	41/21	43/26
	Outdoor High	dB	45	45	50	45	45	50
Electrical Data								
Power Source		V/Hz/Ø	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/
Power Consumption	Cooling	W	480	780	1560	520	850	1560
	Heating	W	620	890	1660	670	980	1660
Operating Current	Cooling	Α	2.4	3.8	7.4	2.5	3.9	7.4
	Heating	Α	3.0	4.1	7.7	3.1	4.5	7.7
Dimension & Loading Q'ty								
Net Dimension (W*H*D)	Indoor	mm	880*313*237	880*313*237	880*313*237	880*313*237	880*313*237	880*313*237
	Outdoor	mm	790*545*285	790*545*285	790*545*285	790*545*285	790*545*285	790*545*28
Net Weight	Indoor	kg	12.1	12.1	12.4	11.2	11.2	12.4
	Outdoor	kg	35.5	35.5	37.7	31.2	31.2	37.7
Shipping Weight	Indoor	kg	14.7	14.7	14.9	13.9	13.9	14.9
	Outdoor	kg	38.6	38.6	40.8	34.3	34.3	40.8
Loading Q'ty	W Pipe	20/40/40HC	83/172/198	83/172/198	83/172/198	83/172/198	83/172/198	83/172/198
	W/O Pipe	20/40/40HC	84/174/198	84/174/198	84/174/198	84/174/198	84/174/298	84/174/198
Technical Information								
SVC Valve	Liquid	OD	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm
	Gas	OD	Ø 9.52mm	Ø 9.52mm	Ø 12.7mm	Ø 9.52mm	Ø 9.52mm	Ø 12.7mm
Piping Length	Max	m	15	15	30	15	15	30
Piping Height	Max	m	8	8	15	8	8	15
Features								
Air Purification	S-Plasma ion		•	•	•	•	•	•
	Auto Roof Shutter		-	_	_	-	-	_
	Full HD Filter		90	90	90	90	90	90
	DNA Filter		-	-	-	-	-	-
	Deodorizing Filter		-	_	_	-	-	_
	Catechin Filter			_	_	_	_	_
	Allergy Care		•	•	•	•	•	•
	Anti-bacteria Coating			_	_	_	_	_
	Auto Clean		•	•	•	•	•	•
Air Flow	Wide Twin Blade		•	•	•	•	•	•
	Optimal Single Blade		-	-	-	-	-	_
	Fan speed(Steps)		4	4	4	4	4	4
	Air Direction (Up/Down)		Auto	Auto	Auto	Auto	Auto	Auto
	Air Direction (Left/Right)		Auto	Auto	Auto	Auto	Auto	Auto
	Natural Breeze		Auto	Auto	Auto	Auto	Auto	Auto
Operating Mode	d'light Cool		•	•	•	•	•	•
- p. c. ag mode	good'sleep		•	•	•		•	•
	Smart Saver		•	•	•	•	•	•
	Turbo		•	•	•	•	•	•
	Dehumidification		•	•	•	•	•	•
	Auto Mode		•	•	•	•	•	•
	Fan Mode		•	•		•	•	•
	Quiet Mode		•	•	•	•	•	•
Convenience	Smart wifi		•	•	•	-	•	-
Convenience	Filter Cleaning Indicator							
	Temp. Display		-	-	-	-	-	-
	Remote Controller		•	•	•	•	•	•
			•	•	•	•	•	•
	Display On/Off		•	•	•	•	•	•
	Beep On/Off		•	•	•	•	•	•
	Real-time Timer		•	•	•	•	•	•
	24-Hour Timer		-	-	-	-	-	-
	Auto Restart		•	•	•	•	•	•
	Auto Changeover		•	•	•	•	•	•
Outdoor Unit	Compressor Type		Twin BLDC	Twin BLDC	Twin BLDC	BLDC	BLDC	Twin BLDC
	Anti-corrosion Fin		•	•	•	•	•	•
	Multi-channel Condensor		-	-	-	-	-	-
Low Ambient	Cooling	°C	-10~46	-10~46	-10~46	-10~46	-10~46	-10~46
	Heating	°C	-15~24	-15~24	-15~24	-15~24	-15~24	-15~24
					· ·			

* Features may vary by model, as a continuing policy of product improvement, the design and specifications are subject to change with	hout notice

	D-corios /A	//aldives++)			D corico	(Maldives)		
AQV09PMEN	P-series (Maldives++) AQV12PMEN AQV24PMBN AQV24PMBN			P-series (Maldives) AQV09PSBN AQV12PSBN AQV18PSBN AQV24PSBN AQV24PSBN				
INV. HP	INV. HP	INV. HP	INV. HP	INV. HP	INV. HP	INV. HP	INV. HP	
R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	
8,500	11,940	17,060	23,202	8,530	11,942	17,060	23,202	
3300~11300	3300~13650	5459~20472	7506~27296	3310~11260	3310~13648	5459~20472	7506~27296	
2,150	3,000	4,300	5,848	2,150	3,010	4,300	5,848	
835~2840	835~3440	1380~5160	1890~6880	830~2840	830~3440	1380~5160	1890~6880	
2.5	3.5	5	6.8	2.5	3.5	5	6.8	
0.97~3.3	0.97~4.0	1.6~6.0	2.2~8.0	0.97~3.3	0.97~4.0	1.6~6.0	2.2~8.0	
11,300	13,650	20,472	26,614	11,260	13,648	20,472	26,614	
3300~16000	3300~18400	4094~25590	6483~34120	3310~16036	3310~18425	4094~25590	6483~34120	
2,840 835~4040	3,440 835~4650	5,160 1030~6450	6,708 1630~8600	2,838 830~4040	3,440 830~4640	5,160 1030~6450	6,708 1630~8600	
3.3	4.0	6.0	7.8	3.3	4.0	6.0	7.8	
0.97~4.7	0.97~5.4	1.2~7.5	1.9~10.0	0.97~4.7	0.97~5.4	1.2~7.5	1.9~10.0	
14.7	12.3	11.6	11.0	13.7	11.3	11.6	11.0	
4.30	3.60	3.40	3.21	4.02	3.30	3.40	3.21	
4.10	3.70	3.61	3.61	4.10	3.70	3.61	3.61	
0.9	1.4	2.0	3.1	0.9	1.4	2.0	3.1	
11.3	11.5	13.8	17.1	9.0	9.8	13.8	17.1	
36/21	38/21	40/30	41/30	36/21	38/21	40/30	41/30	
45	45	53	55	45	45	53	55	
220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1	
580	970	1470	2120	620	1060	1470	2120	
800	1080	1660	2160	800	1080	1660	2160	
3.2	4.8	6.8	9.5	3	4.8	6.8	9.5	
3.8	4.9	7.7	10	3.8	4.9	7.7	10	
000*005*005	000*005*005	4005*000*222	4005*000*000	000*005*005	000+005+005	4005*000****	4005*000*5	
820*285*205	820*285*205	1065*298*230	1065*298*230	820*285*205	820*285*205	1065*298*230	1065*298*230	
790*545*285	790*545*285	790*545*285	880*798*310	790*545*285	790*545*285	790*545*285	880*798*310	
8.2	8.2	11.5	11.5	8.2	8.2	11.5	11.5	
31.2 10.2	31.2 10.2	38 14.5	53.5 14.5	30.5 10.4	30.5 10.4	38 14.5	53.5 14.5	
34.3	34.3	42	14.5	34.5	34.5	42	14.5	
83/172/198	83/172/198	78/162/181	52/108/124	83/172/198	83/172/198	78/162/181	52/108/124	
84/184/210	84/184/210	78/164/186	52/108/124	84/184/210	84/184/210	78/164/186	52/108/124	
04/104/210	04/104/210	70/104/100	32/100/124	04/104/210	04/104/210	70/104/100	32/100/124	
Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	
Ø 9.52mm	Ø 9.52mm	Ø 12.7mm	Ø 15.88mm	Ø 9.52mm	Ø 9.52mm	Ø 12.7mm	Ø 15.88mm	
15	15	30	30	15	15	30	30	
8	8	15	15	8	8	15	15	
-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	
90	90	90	90	80	80	80	80	
-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	
•	•	•	•	-	-	-	-	
-	-	-	-	•	•	•	•	
•	•	•	•	•	•	•	•	
•	-	-	-	•	-	-	-	
4	4	4	4	4	4	4	4	
Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	
Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	
•	•	•	•	•	•	•	·	
-	-	-	-	-	-	-	-	
•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	
-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	
•	•	<u>-</u>	-	<u>-</u>	<u>-</u>	-	-	
•	•	•	•	•	•	•	•	
-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	
•	•	-	-	-	-	-	-	
•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•	•	
BLDC	BLDC	Twin BLDC	Twin BLDC	BLDC	BLDC	Twin BLDC	Twin BLDC	
•	•	• IWIII BLDC	• IWIII BLDG	• BLDC	•	• IWIII BLDG	• IWIII BLDC	
-	-	-	-	-	-	-	-	
-10~46	-10~46	-10~46	-10~46	-10~46	-10~46	-10~46	-10~46	

* Features may vary by model, as a continuing policy of product improvement, the design and specifications are subject to change without notice.







Europe

Model Code			AQV09P*CNEUR	P-series (I	AQV12P*CNEUR	AQV12PWCNCEE	AQ09TSBNEUR	(Boracay) AQ09TSBNCE
AC Type			INV. HP	INV. HP	INV. HP	INV. HP	HP	HP
Refrigerant Type			R410A	R410A	R410A	R410A	R410A	R410A
Performance								
Capacity	Cooling	Btu/hr.	8,500	8,500	11,300	11,300	9,384	9,384
		(min~max)	2259~10918	2259~10918	2559~12966	2559~12966	-	-
		Kcal/hr.	2,150	2,150	2,838	2,838	2,365	2,365
		(min~max)	650~2750	650~2750	650~3270	650~3270	-	-
		kW	2.5	2.5	3.3	3.3	2.8	2.8
		(min~max)	0.75~3.2	0.75~3.2	0.75~3.8	0.75~3.8	-	-
	Heating	Btu/hr.	11,300	11,300	13,600	13,600	9,896	9,896
		(min~max)	3241~13989	3241~13989	3241~16378	3241~16378	-	-
		Kcal/hr.	2,838	2,838	3,440	3,440	2,494	2,494
		(min~max)	820~3530	820~3530	820~4130	820~4130	-	-
		kW	3.3	3.3	4.0	4.0	2.9	2.9
		(min~max)	0.95~4.1	0.95~4.1	0.95~4.8	0.95~4.8	-	-
nergy Efficiency	Cooling	EER(Btu/W)	11.6	11.6	11.0	11.0	11.0	11.0
		EER(W/W)	3.40	3.40	3.21	3.21	3.22	3.22
	Heating	COP(W/W)	3.63	3.63	3.61	3.61	3.61	3.61
Noisture Removal		ℓ/hr.	1.0	1.0	1.1	1.1	1.0	1.0
ir Circulation (Max)		m³/min	8.6	8.6	9.9	9.9	7.5	7.5
loise Level	Indoor High/Low	dB	35/21	35/21	37/21	37/21	32/24	32/24
	Outdoor High	dB	45	45	47	47	47	47
lectrical Data								
ower Source		V/Hz/Ø	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/
Power Consumption	Cooling	W	740	740	1030	1030	855	855
	Heating	W	910	910	1110	1110	803	803
Operating Current	Cooling	Α	3.8	3.8	4.8	4.8	4.1	4.1
	Heating	Α	4.4	4.4	5.2	5.2	3.7	3.7
Dimension & Loading Q'ty								
Net Dimension (W*H*D)	Indoor	mm	820*285*205	820*285*205	820*285*205	820*285*205	820*285*210	820*285*210
	Outdoor	mm	720*548*265	720*548*265	720*548*265	720*548*265	660*470*240	660*470*240
Net Weight Shipping Weight	Indoor	kg	8.2	8.2	8.2	8.2	8	8
	Outdoor	kg	26.5	26.5	27.5	27.5	23.2	23.2
	Indoor	kg	10.4	10.4	10.4	10.4	10.2	10.2
•	Outdoor	kg	29.5	29.5	30.5	30.5	25.5	25.5
oading Q'ty	W Pipe	20/40/40HC	93/193/225	93/193/225	93/193/225	93/193/225	117/240/274	117/240/274
	W/O Pipe	20/40/40HC	95/200/232	95/200/232	95/200/232	95/200/232	123/253/285	123/253/285
Technical Information			00/200/202	00/200/202	00/200/202	00/200/202	120/200/200	120/200/200
SVC Valve	Liquid	OD	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm
	Gas	OD	Ø 9.52mm	Ø 9.52mm	Ø 9.52mm	Ø 9.52mm	Ø 9.52mm	Ø 9.52mm
Piping Length	Max	m	15	15	15	15	15	15
Piping Height	Max	m	7	7	7	7	7	7
eatures					-			
Air Purification	S-Plasma ion		-	-	-	_	-	_
	Auto Roof Shutter		-	-	_	_	_	_
	Full HD Filter		80	80	80	80	80	80
	DNA Filter		-	-	-	-	-	-
	Deodorizing Filter		-	-	_	_	-	_
	Catechin Filter			_	_	_		_
	Allergy Care			-	_	-		_
	Anti-bacteria Coating		•	•	•	•	•	
	Auto Clean		•	•	•	•	•	•
Air Flow	Wide Twin Blade		-	-	-	-	<u> </u>	-
	Optimal Single Blade		•	•	•	•	•	•
	Fan speed(Steps)		4	4	4	4	4	4
	Air Direction (Up/Down)		Auto	Auto	Auto	Auto	Auto	Auto
	Air Direction (Left/Right)		Manual	Manual	Manual	Manual	Manual	Manual
	Natural Breeze		•	IVIAITUAI •	ıvıarıuai	IVIATIUAI	ıvıarıuaı	iviariuai
Operating Mode	d'light Cool		-	-		-	<u> </u>	
	good'sleep		-	•	•	•	•	•
	Smart Saver		•	•	•	•	•	•
	Turbo		•	•	•	•	•	
	Dehumidification		•	•	•	•	•	•
	Auto Mode		•	•	•	•	•	
	Fan Mode		•	•	•	•	•	
	Quiet Mode		•	•	•	•	<u> </u>	-
Convenience	Smart wifi		• •	-	-	-	-	-
	Filter Cleaning Indicator					-	-	
	Temp. Display		-	-	-	-	-	-
	Remote Controller						•	-
			•	•	•	•	•	
	Display On/Off		-	-	-	-	-	-
	Beep On/Off		-	-	-	-	-	-
	Real-time Timer		-	-	-	-	-	-
	24-Hour Timer		•	•	•	•	•	•
	Auto Restart		•	•	•	•	•	•
	Auto Changeover		•	•	•	•	•	•
Outdoor Unit	Compressor Type		BLDC	BLDC	BLDC	BLDC	ROTARY	ROTARY
	Anti-corrosion Fin		•	•	•	•	•	•
	Multi-channel Condensor		-	-	-	-	-	-
ow Ambient	Cooling	°C	16~46	16~46	16~46	16~46	15~43	15~43
	Heating	°C	-10~24	-10~24	-10~24	-10~24	-5~24	-5~24

* Features may vary by model, as a continuing policy of product improvement, the design and specifications are subject to change with	hout notice

		Cry	/stal				
AQ12TSBNEUR	AQ12TSBNCEE	AQ18TSBNEUR	(Boracay) AQ18TSBNCEE	AQ24TSBNEUR	AQ24TSBNCEE	AQV09EWCN	AQV12EWC
HP	HP	HP	HP	HP	HP	INV. HP	INV. HP
R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
11,944	11,944	17,745	17,745	23,205	23,205	8,530	11,940
-	-	-	-	-	-	3,378~10,919	3,380~13,65
3,010	3,010	4,472	4,472	5,848	5,848	2,150	3,010
	-	-	-	-	-	851~2752	850~3,440
3.5	3.5	5.2	5.2	6.8	6.8	2.5	3.5
12,968	12,968	19,793	19,793	23,888	23,888	0.99~3.2 10,919	0.99~4.0 13,648
-	12,300	19,795	19,795	-	-	3,378~17,743	3,378~20,47
3,268	3,268	4,988	4,988	6,020	6,020	2,752	3,440
-	-	-	-	-	-	851~4471	851~5,160
3.8	3.8	5.8	5.8	7	7	3.2	4.0
-	-	-	-	-	-	0.99~5.2	0.99~6.0
3.21	11.0 3.21	9.6 2.81	9.6 2.81	9.6	9.6 2.81	15.7 4.60	13.7 4.00
3.61	3.61	3.22	3.22	2.81	2.81	4.60	4.20
1.5	1.5	1.8	1.8	2.4	2.4	1.0	1.0
9.5	9.5	13	13	17	17	11.5	8.0
35/26	35/26	40/31	40/31	42/33	42/33	35 / 21	39 / 21
48	48	52	52	54	54	45	45
200 240/52/4	000 040/50/4	000 040/50/4	000 040/50/4	000 040/50/4	000 040/50/4	000 040/50/4	000 040/501
220~240/50/1 1090	220~240/50/1 1090	220~240/50/1 1850	220~240/50/1 1850	220~240/50/1 2420	220~240/50/1 2420	220~240/50/1 540	220~240/50/ 880
1053	1053	1800	1800	2420	2420	700	950
5.4	5.4	8.3	8.3	10.8	10.8	2.8	4.2
5.1	5.1	8.1	8.1	11.2	11.2	3.4	4.6
820*285*210	820*285*210	1065*298*225	1065*298*225	1065*298*225	1065*298*225	890*285*190	890*285*205
660*470*240	660*470*240	790*548*285	790*548*285	880*638*310	880*638*310	790*548*285	790*548*285
8.4 25.6	8.4 25.6	11 40	11 40	11.7 51	11.7 51	9.2 36	9.2
10.55	10.55	13.2	13.2	13.7	13.7	11.4	11.4
27.8	27.8	42.3	42.3	55	55	40	40
117/240/274	117/240/274	78/162/181	78/162/181	63/131/149	63/131/149	85/177/201	85/177/201
123/253/285	123/253/285	78/164/186	78/164/186	66/138/153	66/138/153	88/182/213	88/182/213
				-			
Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm	Ø 6.35mm Ø 15.88mm	Ø 6.35mm Ø 9.52mm	Ø 6.35mm
Ø 12.7mm	Ø 12.7mm 15	Ø 12.7mm 15	Ø 12.7mm 15	Ø 15.88mm 20	20	Ø 9.52mm 15	Ø 9.52mm 15
7	7	8	8	8	8	8	8
·		-		_	-	-	_
-	-	-	-	-	-	•	•
-	-	-	-	-	-	-	-
80	80	80	80	80	80	80	80
-	-	-	-	-	-	•	-
-	-	-	-	-	-	•	•
-	-	-	-	-	-	-	-
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
-	-	-	-	-	-	-	-
4	4	4	4	4	4	4	4
Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
•	•	•	•	•	•	•	•
-	-	-	-	-	-	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
-	-	-	-	-	-	•	•
-	-	-	-	-	-	-	-
-	-	-	-	-	-	•	•
•	-	-	-	-	•	•	•
- -	-	-	-	-	-	•	•
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
• DOTARY	• DOTABY	• DOTA DV	• DOTADY	• DOTADY	• DOTA DV	• DLDC	• BLDC
ROTARY	ROTARY	ROTARY	ROTARY	ROTARY	ROTARY	BLDC •	BLDC
<u> </u>	-	-	-	-	-	<u> </u>	-
15~43	15~43	15~43	15~43	15~43	15~43	-10~46	-10~46

* Features may vary by model, as a continuing policy of product improvement, the design and specifications are subject to change without notice.

